

**Samsung Secret**

Product Information

DATE : 15. Jul. 2011**SAMSUNG TFT-LCD****MODEL : LTA400HF24**

The Information Described in this Specification is Preliminary and can be changed without prior notice

LCD Business

Samsung Electronics Co . , LTD.

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

1 / 28

**Contents****Samsung Secret**

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(6)
3. Electrical Characteristics	(9)
3.1 TFT LCD Module	
3.2 Back Light Unit	
3.3 Converter Input & Specification	
4. Input Terminal Pin Assignment	(12)
4.1 Input Signal & Power	
4.2 Converter Input Pin Configuration	
4.3 Converter Input Power Sequence	
4.4 LVDS Interface	
4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
5. Interface Timing	(18)
5.1 Timing Parameters (DE mode)	
5.2 LVDS Input data Characteristics	
5.3 3D mode Sequence	
5.4 Timing Diagrams of interface Signal (DE mode)	
5.5 Power ON/OFF Sequence	
6. Outline Dimension	(22)
7. Packing	(24)
8. Marking & Others	(25)
9. General Precaution	(26)
9.1 Handling	
9.2 Storage	
9.3 Operation	
9.4 Operation Condition Guide	
9.5 Others	

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****2 / 28**

**Samsung Secret****Revision History**

Date	Rev. No	Page	Summary
15. Jul. 2011	000	all	First issued

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****3 / 28**

General Description

Samsung Secret

Description

LTA400HF24 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit.

The resolution of a 40.0" is 1920 x 1080 and this model can display up to 16.7 Million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide an excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with wide color gamut
- SPVA(Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response
- FHD resolution (16:9)
- Low Power consumption
- Edge Type LED (Light Emitted Diode) BLU
- DE (Data Enable) mode
- 4ch LVDS (Low Voltage Differential Signaling) interface (4pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	921.7 (H _{TYP}) x 536.3 (V _{TYP})	mm	± 1.0mm
	30.5 (Max.)		
Weight	9,100 (Max.)	g	
Pixel Pitch	0.46125 (H) x 0.15375 (W) x 3	mm	
Active Display Area	885.6 (H) x 498.15 (V)	mm	
Surface Treatment	Anti-glare	-	
Display Colors	8bit – 16.7M	Colors	
Number of Pixels	1920 x 1080	Pixel	
Pixel Arrangement	RGB vertical stripe	-	
Display Mode	Normally Black	-	
Luminance of White	400 (Typ.)	cd/m ²	

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****4 / 28**

Samsung Secret

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	GND-0.3	16.5	V	(1)
Storage temperature	T_{STG}	-20	60	°C	(2)
Operation temperature	T_{OPR}	0	50	°C	
Surface temperature	T_{SUR}	0	60	°C	-
Shock (non - operating)	S_{nop}	-	50	G	(3)
Vibration (non - operating)	V_{nop}	-	1.5	G	(4)

Note (1) $T_a = 25 \pm 2$ °C

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ($T_a \leq 39$ °C)

b. Relative Humidity is 90% or less. ($T_a > 39$ °C)

c. No condensation

(3) 11ms, sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$ axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

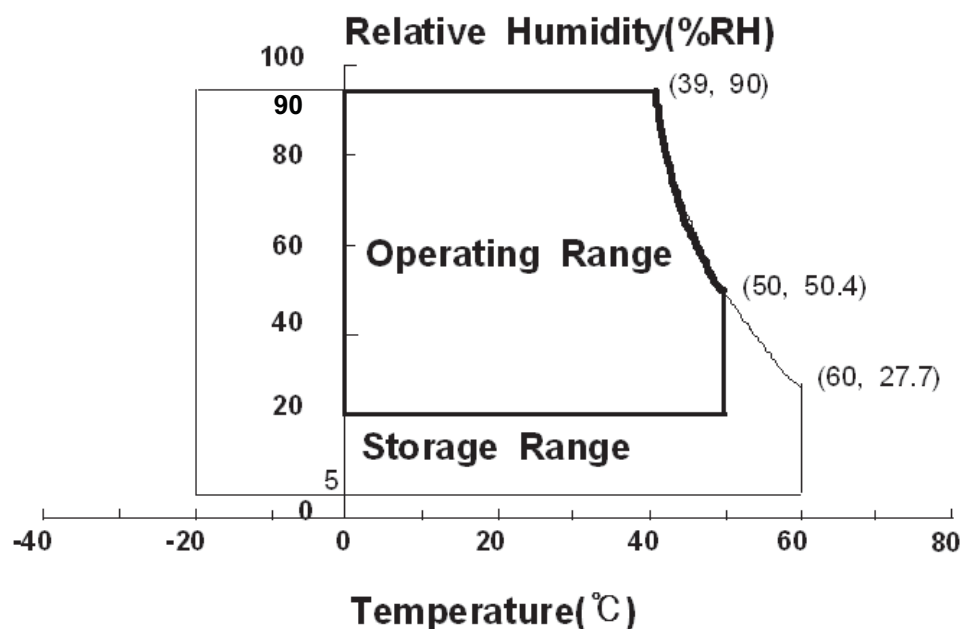


Fig. Temperature and Relative humidity range

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
5 / 28

2. Optical Characteristics

Samsung Secret

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3 ,ELDIM EZ-Contrast

(Ta = 25 ± 2℃, VDD=12.0V, fv=120Hz, f_{DCLK}=297MHz, Dimming Duty = Max)


Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$ Viewing Angle	3,000	4,000	-		(1) SR-3
Response Time	G-to-G	Tg		-	8	-	msec	(3) RD-80S
Luminance of White (Center of screen)		Y _L		350	400	-	cd/m ²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.648	TYP. +0.03		(5),(6) SR-3
		Ry			0.332			
	Green	Gx			0.306			
		Gy			0.592			
	Blue	Bx			0.149			
		By			0.064			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	70	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	
Viewing Angle	Hor.	θ_L	C/R≥10	75	89	-	Degree	(6) EZ-Contrast
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)		B _{uni}		-	-	25	%	(2) SR-3

- Test Equipment Setup


The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 °C

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
6 / 28

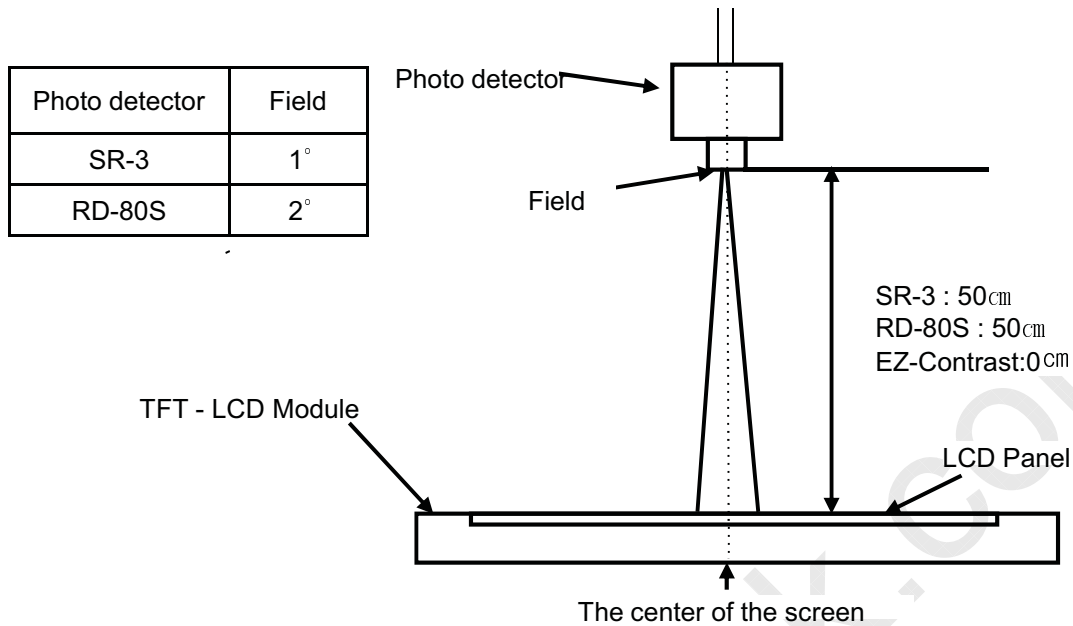Samsung Secret

- Definition of test point

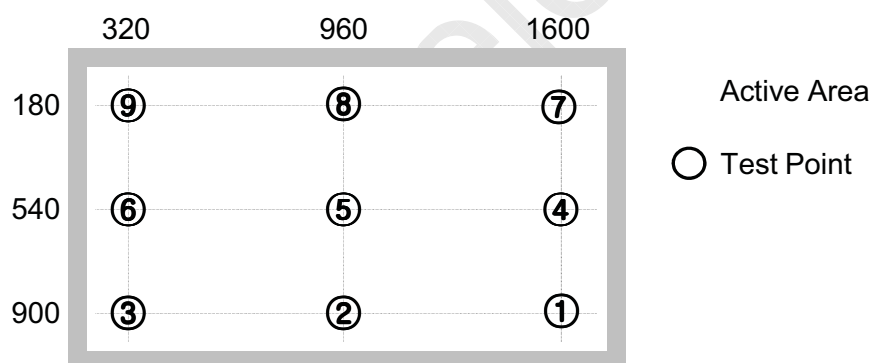

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****7 / 28**

Samsung Secret


Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

B_{max} : Maximum brightness

B_{min} : Minimum brightness

Note (3) Definition of Response time : Sum of T_r, T_f

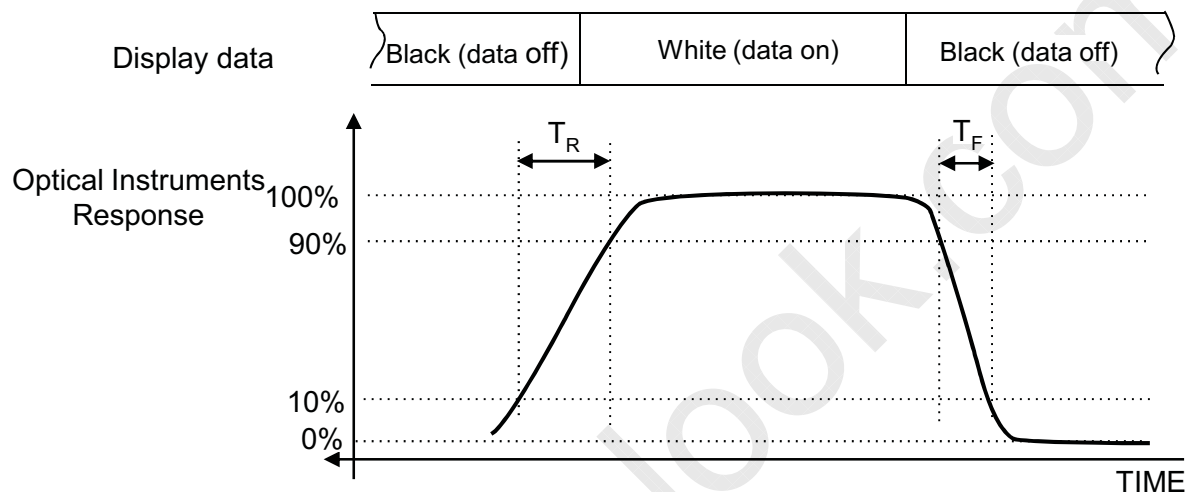

※ G- to- G : Average response time between Gray to Gray (Scale)


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

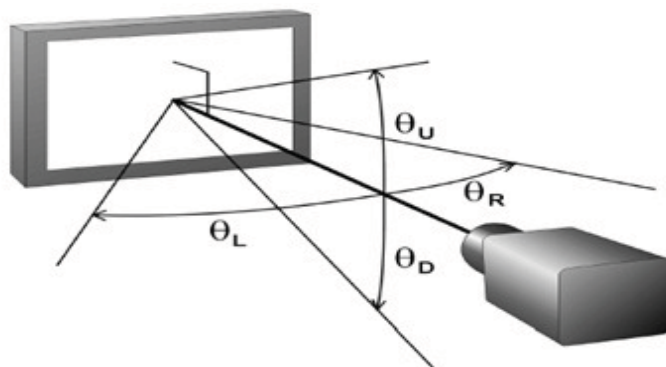

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

8 / 28

Samsung Secret

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	650	750	mA	(2),(3)
	(b) White		-	650	750	mA	
	(c) H-STRIPE		-	1065	1225	mA	
Vsync Frequency		f_V	95	120	125	Hz	
Hsync Frequency		f_H	120	135	140	kHz	
Main Frequency		Fdclk	260	297	305	MHz	
Rush Current		I_{RUSH}	-	-	4	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $f_V=120\text{Hz}$, $f_{DCLK}=297\text{MHz}$, $V_{DD}=12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)



a) Black Pattern




b) White Pattern



c) H-stripe



(4) Measurement Conditions

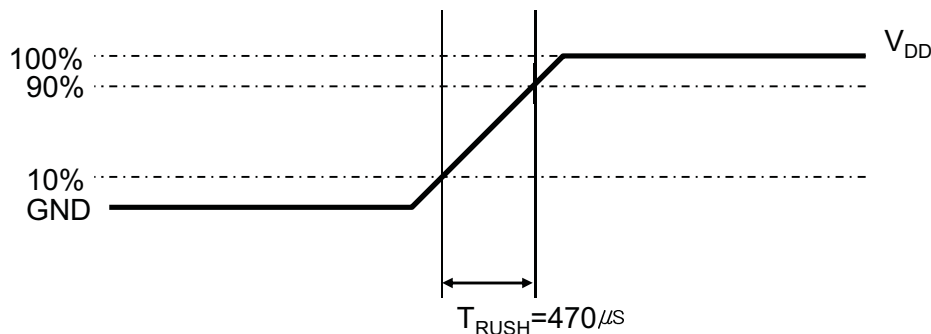

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.


MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****9 / 28**

Samsung Secret

3.2 Back Light Unit

The back light unit contains Edge type White LEDs (Light Emitting Diode)

$T_a = 25 \pm 2^\circ\text{C}$

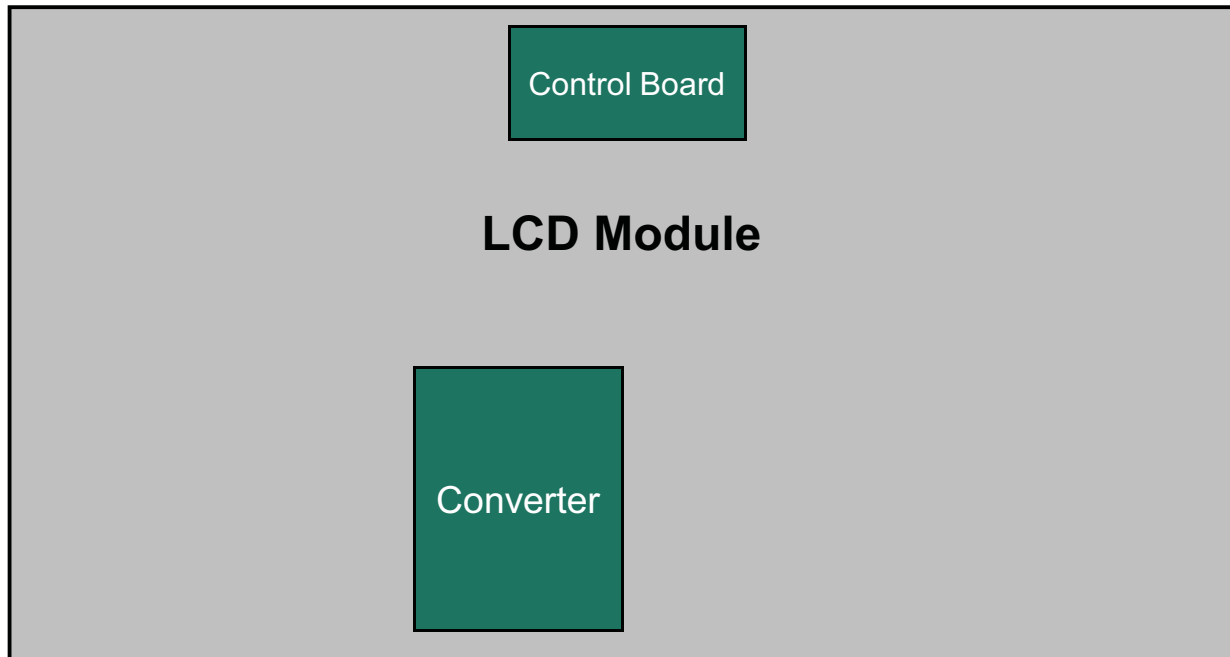

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : $T_a = 25 \pm 2^\circ\text{C}$, For single LED only.]

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****10 / 28**

Samsung Secret

3.3 Converter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V _{in}	-	22	24	26	V	Ta=25±2 °C
Input Current	I _{RUSH,N}	V _{in} =24.0V V _{dim} =3.3V	-	-	4	A	Normal Mode (2D)
	I _{RUSH,B}	V _{in} =24.0V V _{dim} =3.3V	-	-	7	A	Blinking Mode (3D)
Output Current	I _{O,MAX,N}	V _{in} = 24.0V V _{dim} =3.3 V	142.5	150	157.5	mArms	Normal Mode (2D)
	I _{O,MAX,B}	V _{in} = 24.0V V _{dim} =3.3 V	228	240	252	mArms	Blinking Mode (3D)
Backlight On/Off	ON	V _{in} =24.0 V	2.4	-	5.5	V	
	OFF	V _{in} =24.0 V	0	-	0.8		
Dimming Range	V _{DIM}	V _{in} :22~26V	0	-	3.3	V	
Dimming Frequency	F _{PWM}	V _{in} =24.0 V	140	150	160	Hz	
External Dimming Duty Range	EX_Dim	Min	1	-	100	%	(2)
External Dimming Frequency Range	F _{EX_PWM}	V _{in} =22.0~26.0 V	95	-	200	Hz	Dim Pin(#13) : Floating
External Dimming Signal Level	V _{PWM}	High (ON)	2.4	-	5.5	V	
		Low (Off)	0	-	0.8		

Note) Power Consumption is measured when 400 [cd/m] of luminance which is the typical luminance.

(1) All data is measured after 120min warm-up.

(2) SEC only guarantees that waterfall will not happen in internal dimming mode with sync cable between converter and T-con board.

ITEM	SYMBOL	CONDITION	SPECIFICATION			UNIT	NOTE
			MIN	TYP	MAX		
Input Current	lovershoot, 2D	V _{in} =24V, dim=max	-	3.5	3.6	Adc	Maximum current after turn-on
	Isaturation, 2D		-	2.82	2.9	Adc	Saturation current after 1hr aging
	lovershoot, 3D		-	0.8	0.9	Adc	Maximum current after turn-on
	Isaturation, 3D		-	0.76	0.82	Adc	Saturation current after 1hr aging

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
11 / 28

4. Input Terminal Pin Assignment

Samsung Secret

4.1.1 Input Signal & Power

Connector : FI-RE41S-HF (JAE/UJU)

Pin	Description		Pin	Symbol	Description
1	Vdd(12V)		21	ODD LVDS SIGNAL	Rx1[3]P
2	Vdd(12V)		22		No Connection
3	Vdd(12V)		23		No Connection
4	Vdd(12V)		24		GND
5	Vdd(12V)		25		Rx3[0]N
6	No Connection		26		Rx3[0]P
7	GND		27		Rx3[1]N
8	GND		28		Rx3[1]P
9	GND		29		Rx3[2]N
10	ODD LVDS SIGNAL	Rx1[0]N	30		Rx3[2]P
11		Rx1[0]P	31		GND
12		Rx1[1]N	32		Rx3CLK-
13		Rx1[1]P	33		Rx3CLK+
14		Rx1[2]N	34		GND
15		Rx1[2]P	35		Rx3[3]N
16		GND	36		Rx3[3]P
17		Rx1CLK-	37		No Connection
18		Rx1CLK+	38		No Connection
19		GND	39	GND	
20		Rx1[3]N	40	No Connection	
			41	No Connection	

Note) No Connection : This PINS Should be disconnected because of SEC internal design.

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
12 / 28

Samsung Secret

4.1.2 Input Signal & Power

Connector : FI-RE51S-HF (JAE/UJU)

Pin	Description		Pin	Description	
1	Vdd(12V)		26	EVEN LVDS SIGNAL	Rx4[0]P
2	Vdd(12V)		27		Rx4[1]N
3	Vdd(12V)		28		Rx4[1]P
4	Vdd(12V)		29		Rx4[2]N
5	Vdd(12V)		30		Rx4[2]P
6	No Connection		31		GND
7	GND		32		Rx4CLK-
8	GND		33		Rx4CLK+
9	GND		34		GND
10	EVEN LVDS SIGNAL	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		No Connection
13		Rx2[1]P	38		No Connection
14		Rx2[2]N	39	GND	
15		Rx2[2]P	40	No Connection	
16		GND	41	No Connection	
17		Rx2CLK-	42	3D_EM	3D_EN signal (Note 2)
18		Rx2CLK+	43	No Connection	
19		GND	44	No Connection	
20		Rx2[3]N	45	No Connection	
21		Rx2[3]P	46	No Connection	
22		No Connection	47	No Connection	
23		No Connection	48	3D_SYNC_I	Shutter glass Sync Input signal (Note 3)
24		GND	49	3D_SYNC_O	Shutter glass Sync Signal
25		Rx4[0]N	50	No Connection	
			51	No Connection	

Note) No Connection : This PINS Should be disconnected because of SEC internal design.

Note (1) SEC internal Only: These PINS are used only for SAMSUNG. (DO NOT CONNECT)

MODEL

LTA400HF24

Doc. No

06-000-G-20110715


Page

13 / 28

Samsung Secret

Note3) Recommend timing for 3D_SYNC_I Signal .

- Guide Signal to Separate L frame and R frame
- Shutter glass signal & Operation timing also depend on this signal
- To operate 3D function, need this signal from Set A/D board.
(In Order for using it in 2D mode, change the input condition into High)

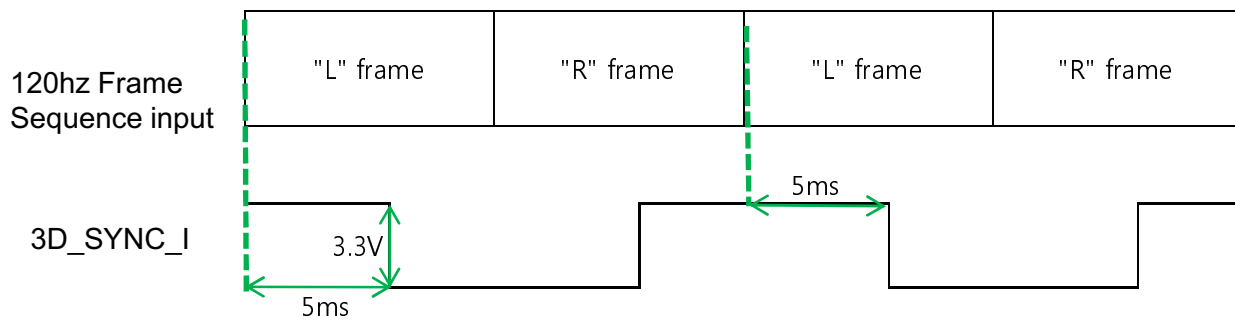

Note4) Pin number starts from Right side

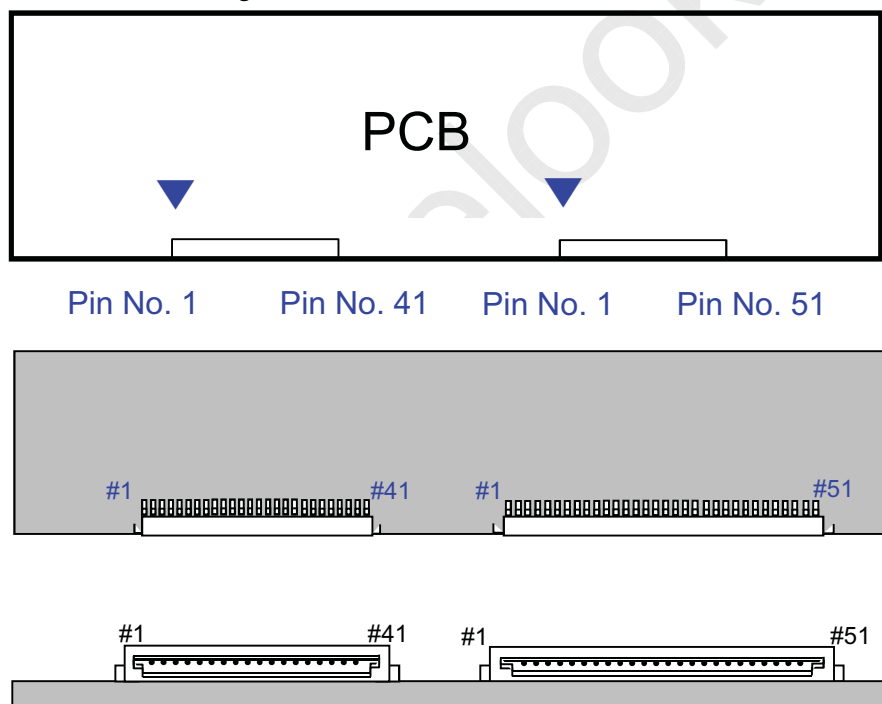


Fig. Connector diagram

- All GND pins should be connected together and also be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pins should be separated from other signal or power.

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

14 / 28

Samsung Secret


4.2. Converter Input Pin Configuration

Connector : Yeon-ho, 20022WR-14B1

Pin No.	Pin Configuration(FUNCTION)
	Master
1 ~5	24 V
6~10	GND
11	No Connection (DO NOT CONNECT)
12	Backlight On /Off [ON:2.4 – 5.25 V, OFF: 0 - 0.8 V]
13	Dimming Control [0V:Min, 3.3V:Max] *Note(1)
14	External PWM [1~100%] *Note(1)

Note(1) If use Dimming Control, Pin 14 Must be N.C
 If use External PWM, Pin 13 Must be N.C

4.3. Converter Input Power Sequence

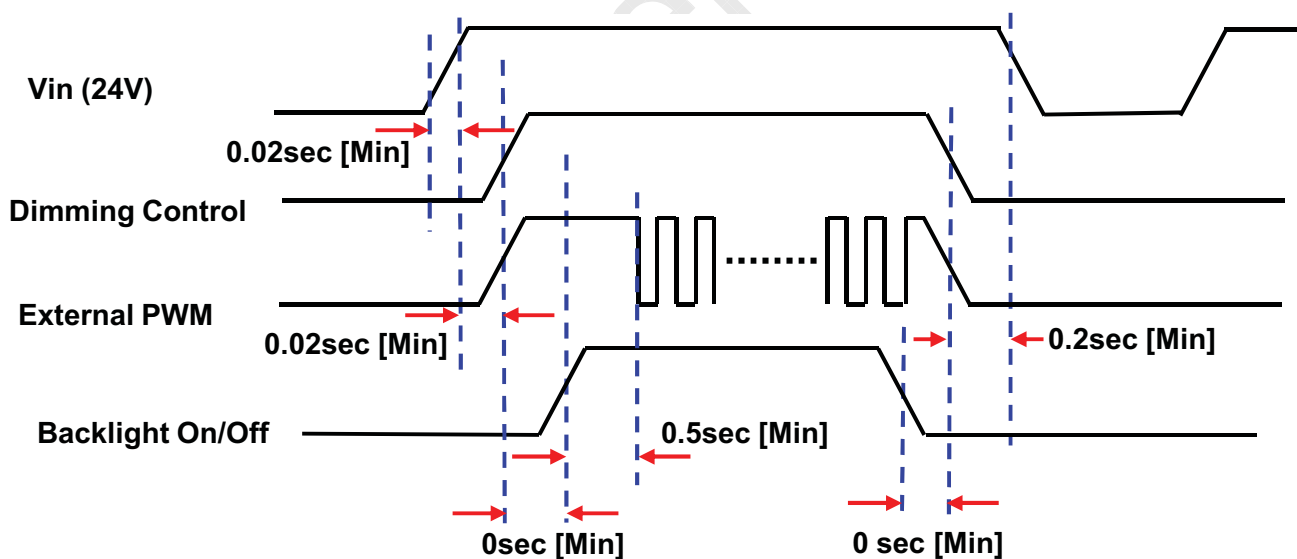

Note) SEQUENCE : On = Vin(24V) > Internal or External PWN ≥ Backlight On/off
 OFF = Backlight On/Off ≥ Internal or External PWN > Vin(24V)

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

15 / 28

4.4 LVDS Interface

Samsung Secret

- LVDS Receiver : T-con (merged)
- Data Format (JEIDA Only)

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2
	TxIN/RxOUT1	R3
	TxIN/RxOUT2	R4
	TxIN/RxOUT3	R5
	TxIN/RxOUT4	R6
	TxIN/RxOUT6	R7
	TxIN/RxOUT7	G2
TxOUT/RxIN1	TxIN/RxOUT8	G3
	TxIN/RxOUT9	G4
	TxIN/RxOUT12	G5
	TxIN/RxOUT13	G6
	TxIN/RxOUT14	G7
	TxIN/RxOUT15	B2
	TxIN/RxOUT18	B3
TxOUT/RxIN2	TxIN/RxOUT19	B4
	TxIN/RxOUT20	B5
	TxIN/RxOUT21	B6
	TxIN/RxOUT22	B7
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYSN
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0
	TxIN/RxOUT5	R1
	TxIN/RxOUT10	G0
	TxIN/RxOUT11	G1
	TxIN/RxOUT16	B0
	TxIN/RxOUT17	B1
	TxIN/RxOUT23	RESERVED

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

16 / 28

Samsung Secret

4.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL
		RED									GREEN									BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7					
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-			
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-			
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-			
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-			
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-			
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-			
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-			
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0			
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1			
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:				R3~ R252			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:							
	↓ LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253			
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254			
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255			
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0			
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1			
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:				G3~ G252			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:							
	↓ LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G253			
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G254			
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G255			
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0			
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B1			
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B2			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:				B3~ B252			
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:							
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	B253			
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B254			
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B255			

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

17 / 28

5. Interface Timing

Samsung Secret

5.1 Timing Parameters (DE mode)

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	260	297	305	MHz	-
Hsync		F_H	120	135	140	KHz	-
Vsync		F_V	95	120	125	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
	Vertical Total	T_V	1092	1125	1380	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
	Horizontal Total	T_H	2092	2200	2348	clocks	-

Note) This product is DE mode. But the Hsync & Vsync signal must be inputted

- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
- (2) Internal VDD = 3.3V
- (3) Spread spectrum
 - Modulation rate (max) : $\pm 1.5\%$
 - Modulation Frequency : under 100KHz

5.2 LVDS Input Data Characteristics

ITEM		SYMBOL	Min.	Typ.	Max.	UNIT	NOTE
Input Data Position	$F_{IN}=85\text{MHz}$	t_{RSRM}	-	-	400	ps	-
	$F_{IN}=78\text{MHz}$		-	-	450	ps	
	$F_{IN}=75\text{MHz}$		-	-	500	ps	
Input Data Position	$F_{IN}=85\text{MHz}$	t_{RSLM}	-400	-	-	ps	
	$F_{IN}=78\text{MHz}$		-450	-	-	ps	
	$F_{IN}=75\text{MHz}$		-500	-	-	ps	
Input common mode voltage		V_{CM}	0.3	-	1.8	V	-
Differential Input Voltage		$ V_{ID} $	200	350	600	mV	-

Note) When the skew is measured the Spread Spectrum should be 0%

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
18 / 28

Samsung Secret

The timing diagram illustrates the sequence of events for the BLU interface. It includes the following signals and parameters:

- Vin**: Input voltage, transitioning from 0.9 VDD to 0.5 VCC.
- 3D_Enable**: A signal that enables the 3D mode, with a pulse width of 8.35 ms.
- LVDS data (Valid)**: Data frames for 2D, L, R, and L, with a total duration of 8.35 ms.
- Sync_I**: Synchronization signal, with a pulse width of T10.
- Power Supply For BLU**: A signal that transitions from 0.5 VCC to 0.5 VCC.
- Sync_O (S/G)**: Synchronization signal output, with a pulse width of T12.

Key timing parameters shown are T6, T7, T8, T9, T10, T11, and T12, which define the duration of various signals and transitions.


	spec	Measure	Result		spec	Measure	Result
T5	≥ 1000 msec			T8	> 0 msec		
T6	≥ 100 msec			T9	> 0 msec		
T7	≥ 2 sec			T10	Typ. 5 msec		
T12	Typ. 4.5msec						

※ T10 : Sync I is checked with Valid Active L frame

Test Items	Test Condition		Spec	
			Min	Max
3D Enable Level	C-PBA Input Level (Change to 3D mode)	High	2.7	3.3
		Low	0.0	0.4
3D_SYNC_I	C-PBA Input Level (L/R Sync)	High	2.7	3.3
		Low	0.0	0.4
3D_SYNC_O	Shutter Glasses Sync Level	High	2.7	3.3
		Low	0.0	0.4

MODEL	LTA400HF24	Doc. No	06-000-G-20110715	Page	19 / 28
--------------	-------------------	----------------	--------------------------	-------------	----------------


5.4 Timing diagrams of interface signal (DE mode)

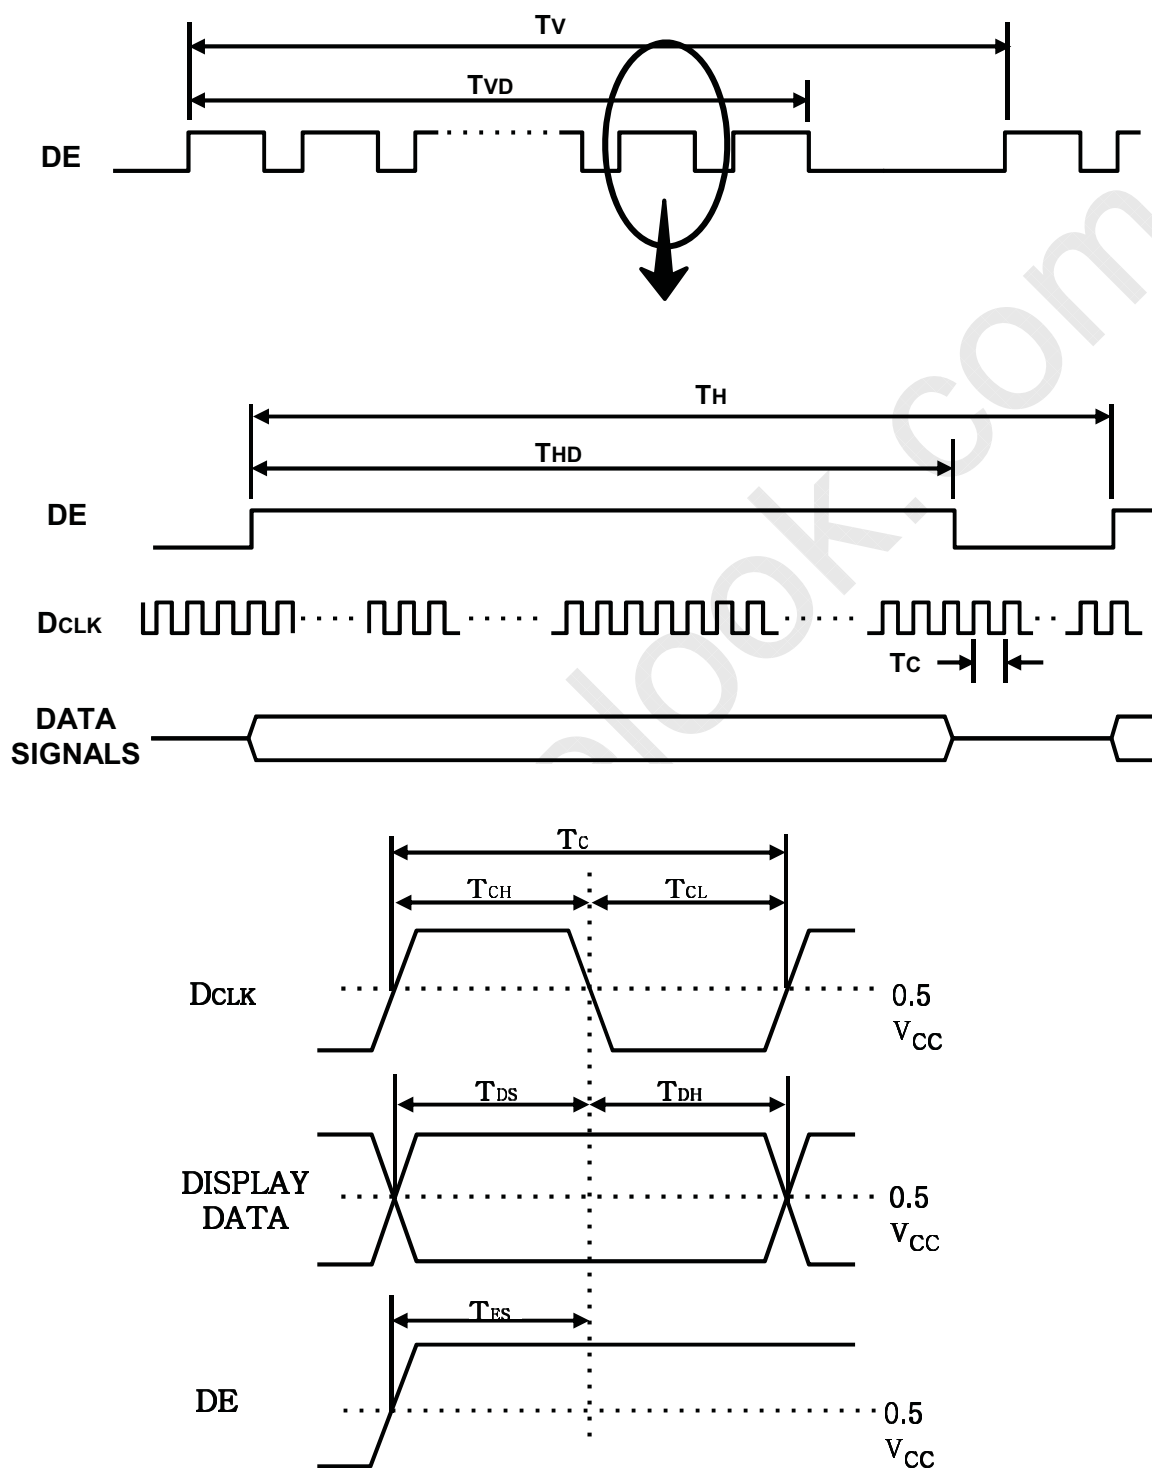Samsung Secret

Samsung Secret


5.4 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

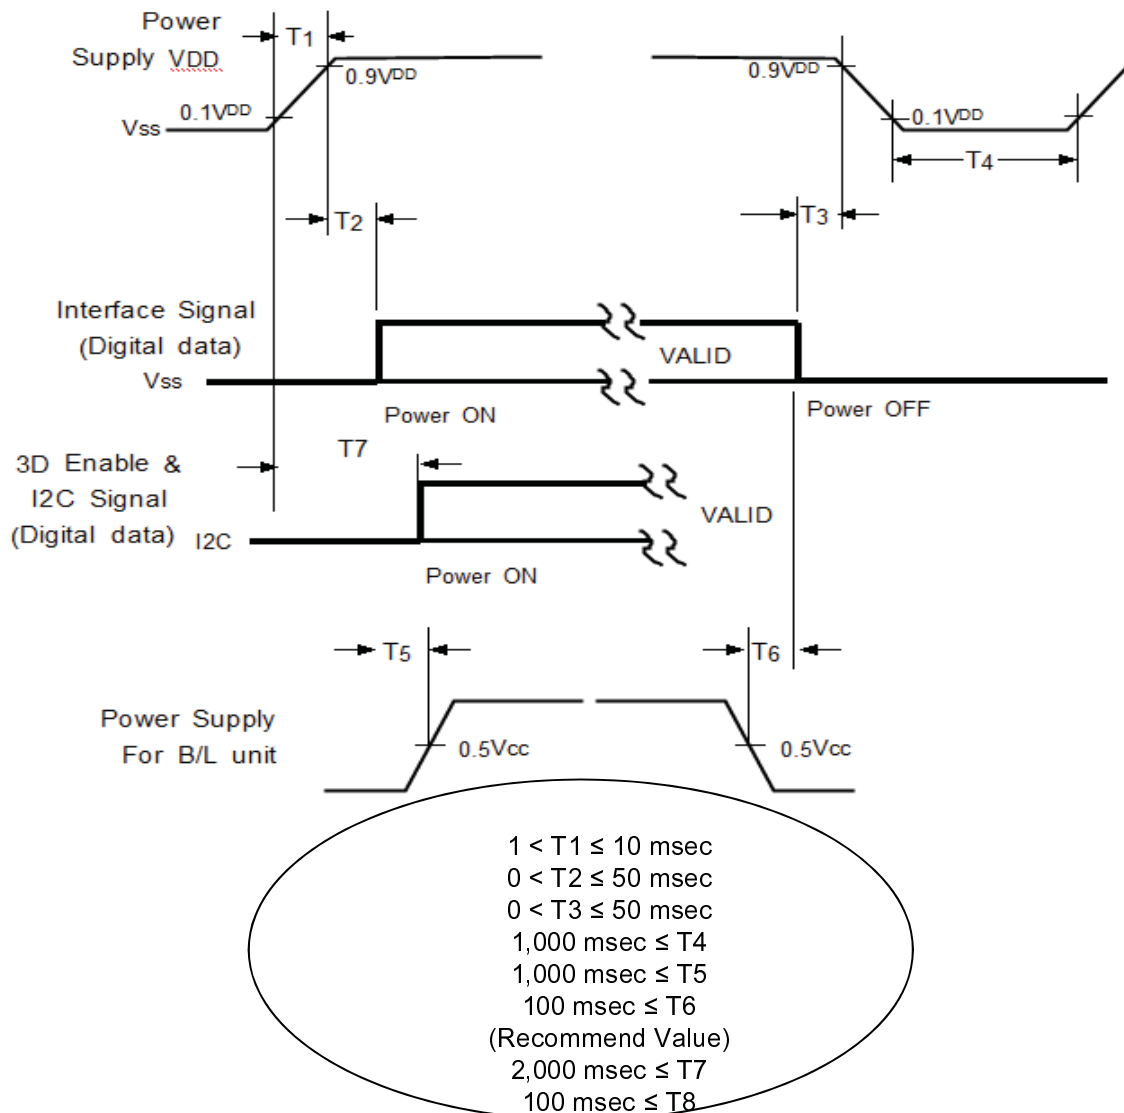

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD} .
- Apply the LED voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of $V_{DD} = \text{off level}$, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

MODEL
LTA400HF24
Doc. No
06-000-G-20110715
Page
21 / 28

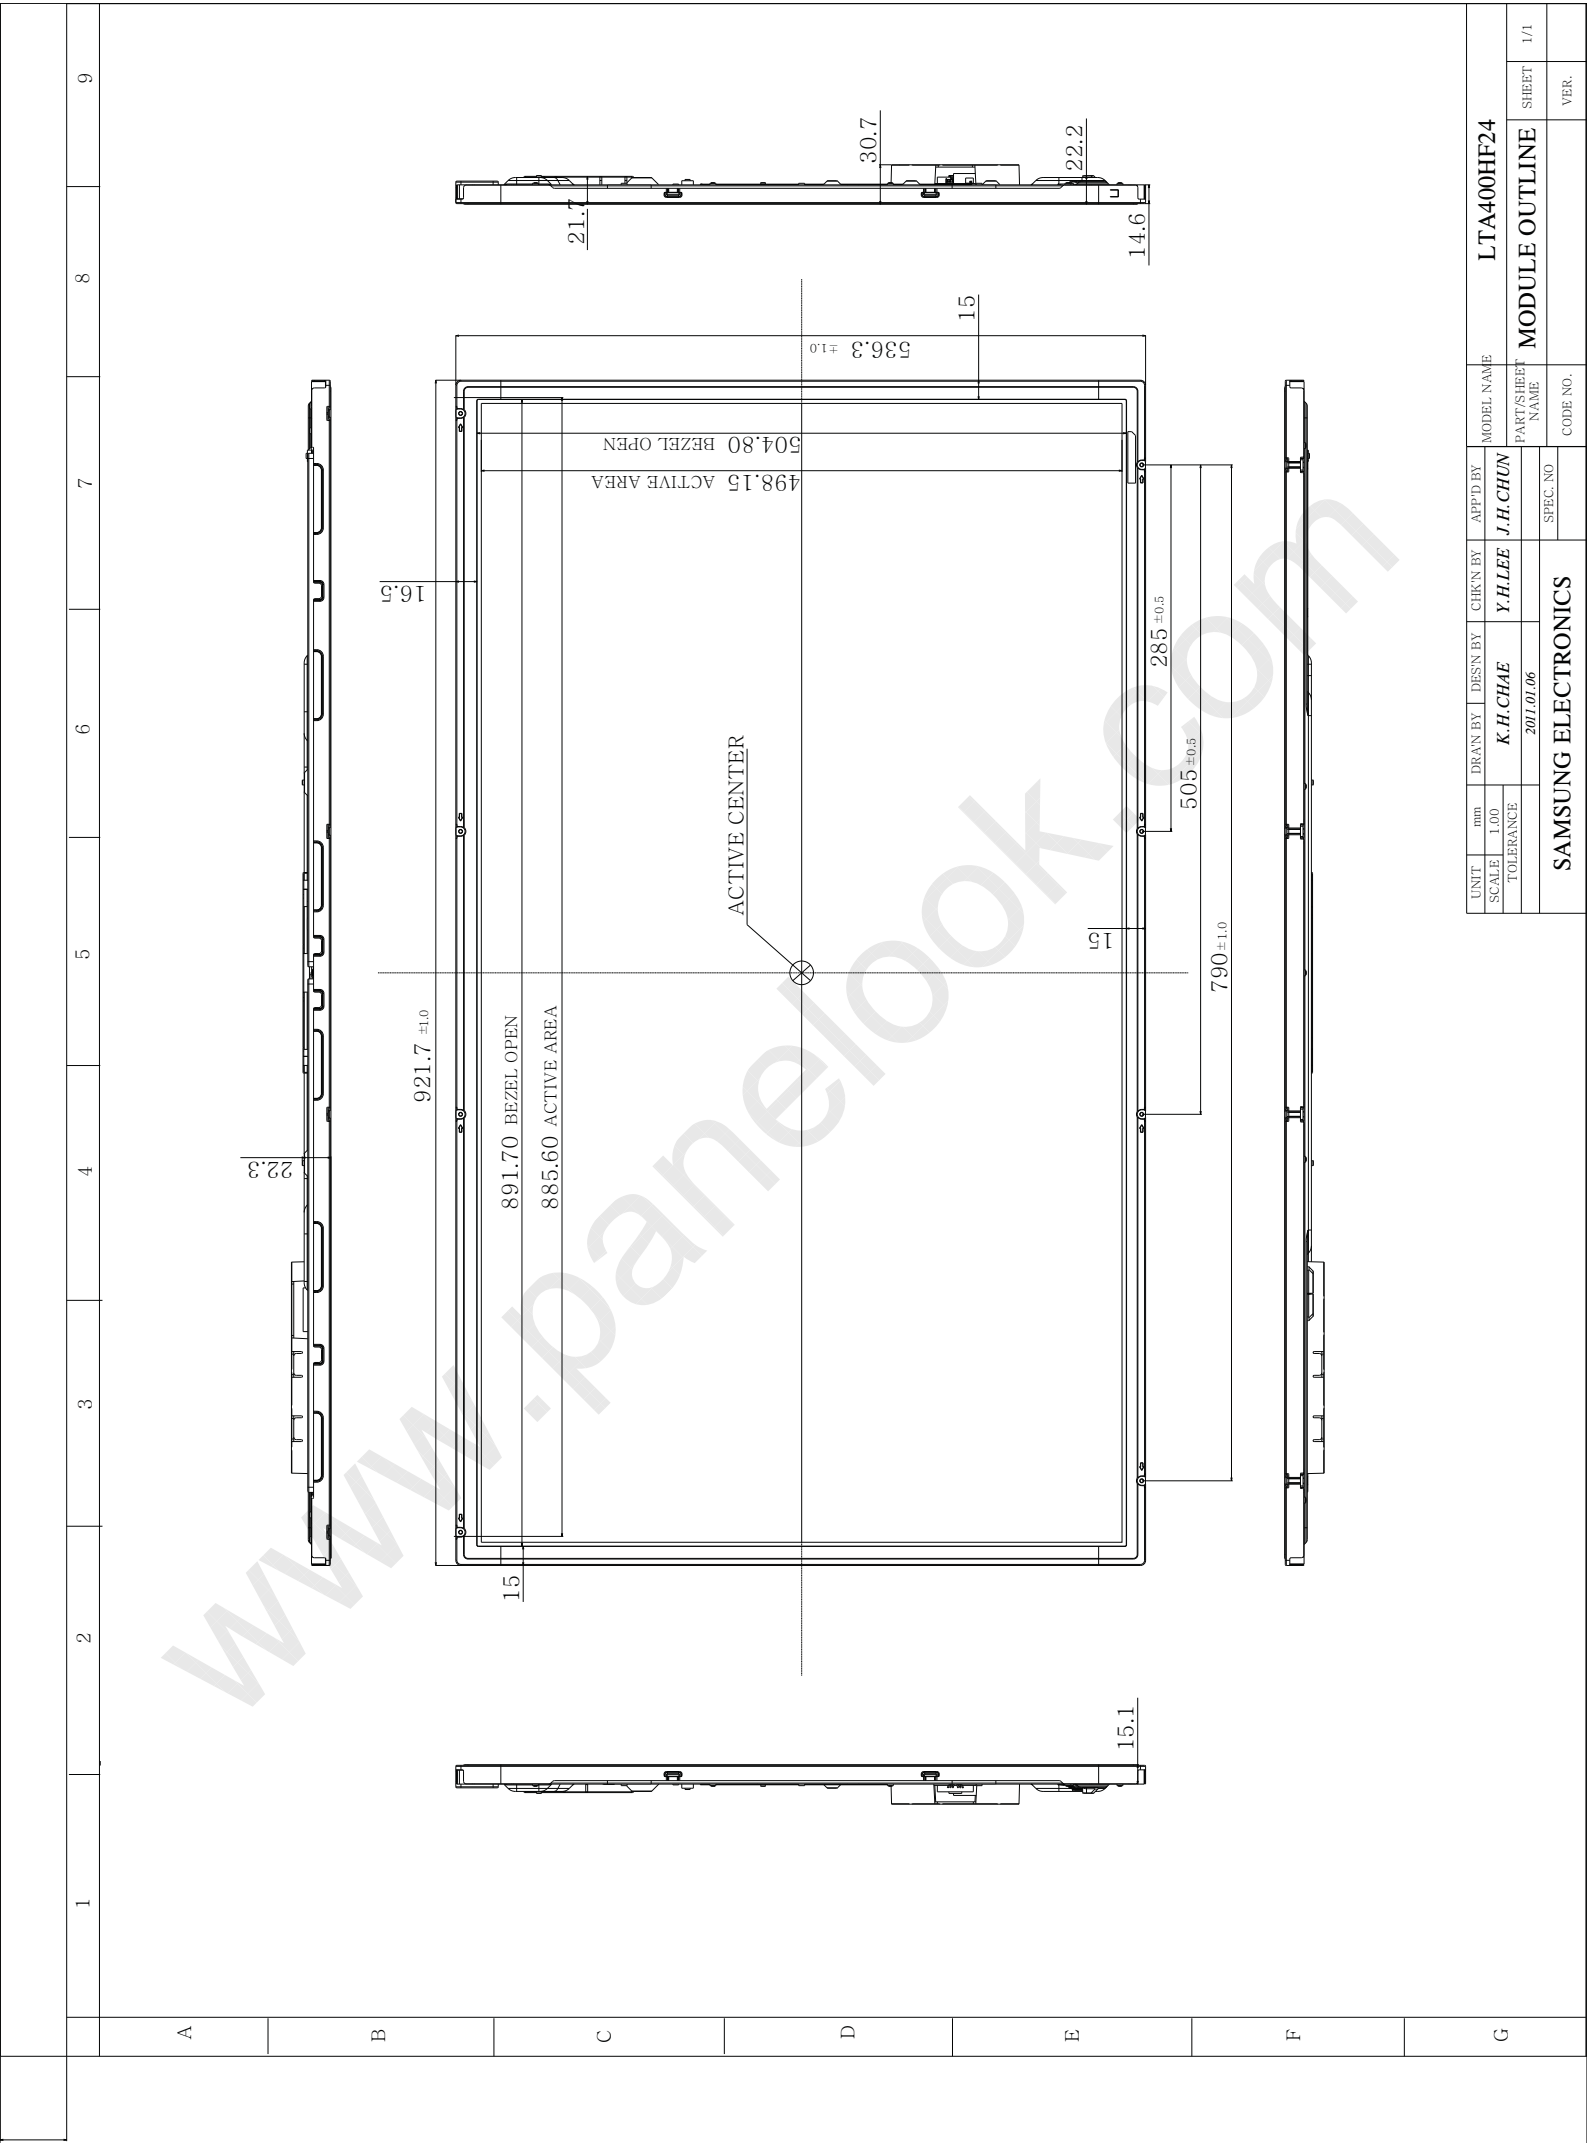

UNIT	mm	DRAWN BY	DESIGN BY	CHK'N BY	APPR'D BY	MODEL NAME	LTA400HF24	
	SCALE	1:00	K. H. CHAE	Y. H. LEE	J. H. CHUN	PART/SHEET NAME	MODULE OUTLINE	
	TOLERANCE						SHEET	1/1
			2011.01.06			SPEC. NO.	CODE NO.	VER.
SAMSUNG ELECTRONICS								

UNIT	mm	DRAIN BY	DESIGN BY	CHK'N BY	APPR'D BY	MODEL NAME	LTA400HF24	
	SCALE							1.00
	TOLERANCE							
SAMSUNG ELECTRONICS								
2011.01.06				SPEC. NO		PART/SHEET NAME	MODULE OUTLINE	SHEET 1/1

Samsung Secret


7. PACKING

7.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

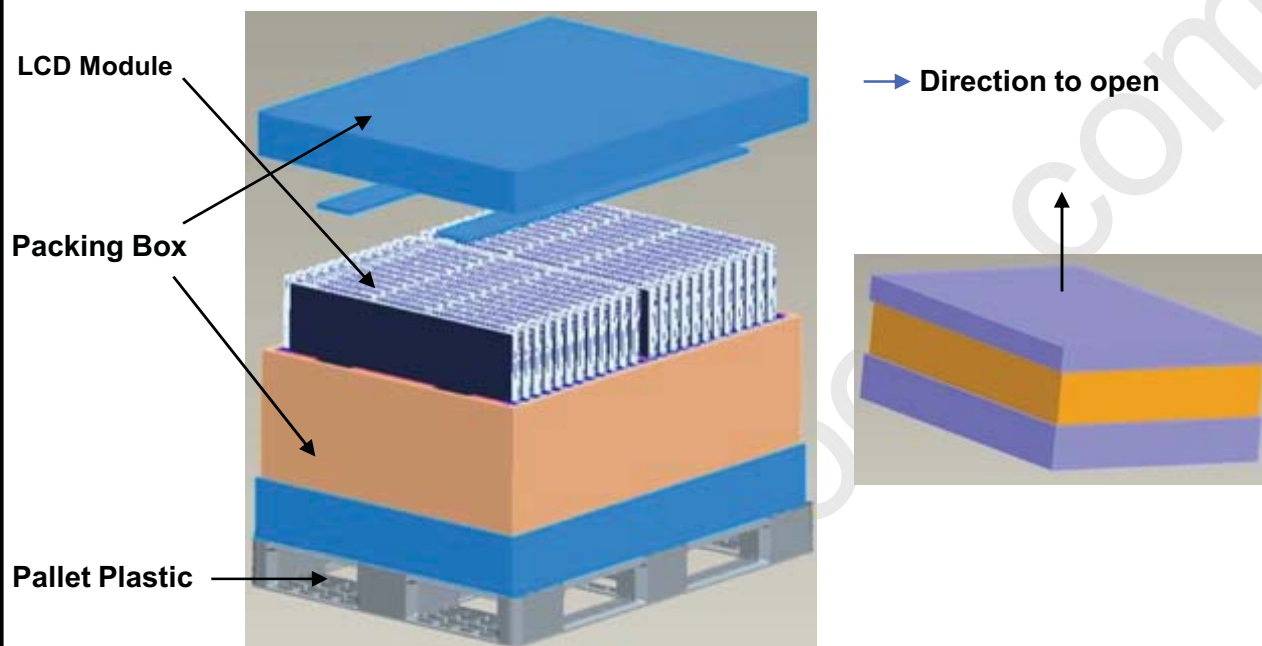

7.2 Packing Specification

ITEM	Specification	Remark
LCD Packing	21ea / Box (Packing-Pallet Box)	1. 8.6Kg / LCD (21ea) 2. 14 Kg / Packing Set 3. Packing Material : Paper
Pallet-Plastic	1Box / Pallet	1. Pallet weight = 5.3kg
Packing Direction	Vertical	
Pallet size	H x V x height	1150mm(H) x 985mm(V) x 711mm(height)
Pallet weight	200.74kg	Module(8.6kgx21=180.6kg) + Pallet(5.3kg)+ Packing SET(14kg) + Desiccant(0.04kgx21=0.84kg)

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****24 / 28**

Samsung Secret


8. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Part number : LTA400HF24

(2) Revision: Three letters


(3) Lot number : X X X X XXX XX X

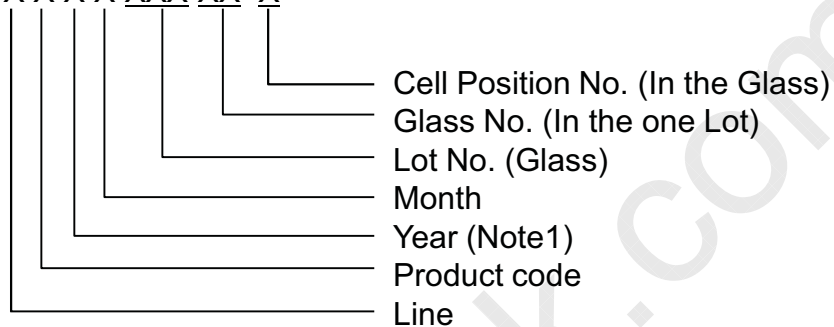

(4) Nameplate Indication

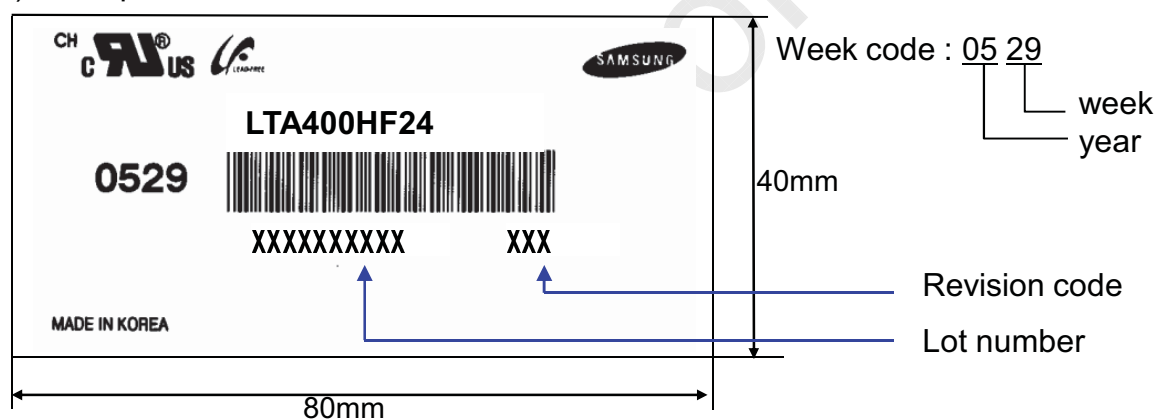

(5) Packing box attach

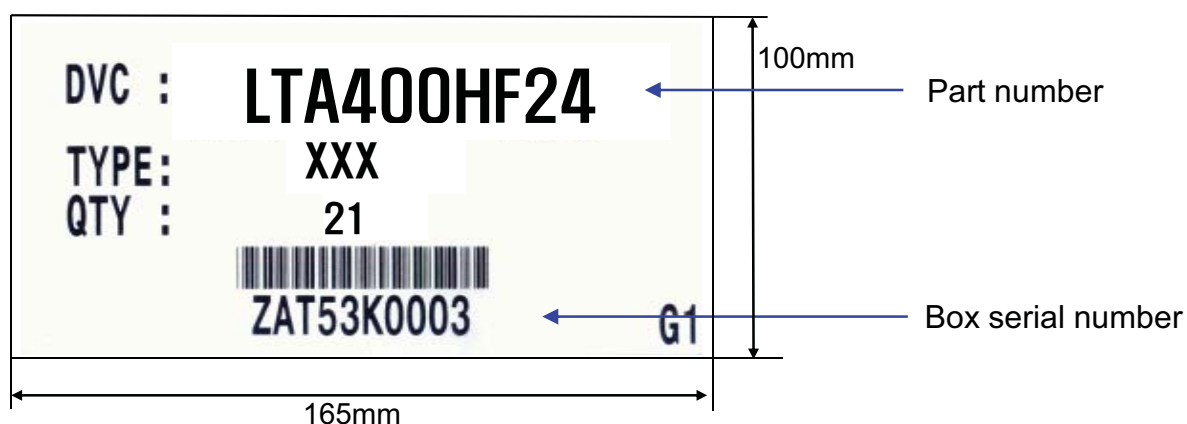

(6) Others

1. After service part

LEDs cannot be replaced because of the narrow bezel structure.

MODEL

LTA400HF24

Doc. No

06-000-G-20110715

Page

25 / 28

9. General Precautions

Samsung Secret

9.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the converter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and LED back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of converter & LVDS board.
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA400HF24	Doc. No	06-000-G-20110715	Page	26 / 28
-------	------------	---------	-------------------	------	---------

Samsung Secret

9.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 5 to 40 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.
- (d) Storage period is recommended not to excess 1 year.

9.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its converter power supply should be connected directly with a minimized length. A longer cable between the back light and the converter may cause lower luminance of LED and may require higher startup voltage (Vs).

9.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : 20± 15 °C
 - Humidity : 55± 20%
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA400HF24	Doc. No	06-000-G-20110715	Page	27 / 28
-------	------------	---------	-------------------	------	---------

9.5 Others

Samsung Secret

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked " to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL**LTA400HF24****Doc. No****06-000-G-20110715****Page****28 / 28**